


BF MOD-PLUS MARATHON™ APPLICATOR

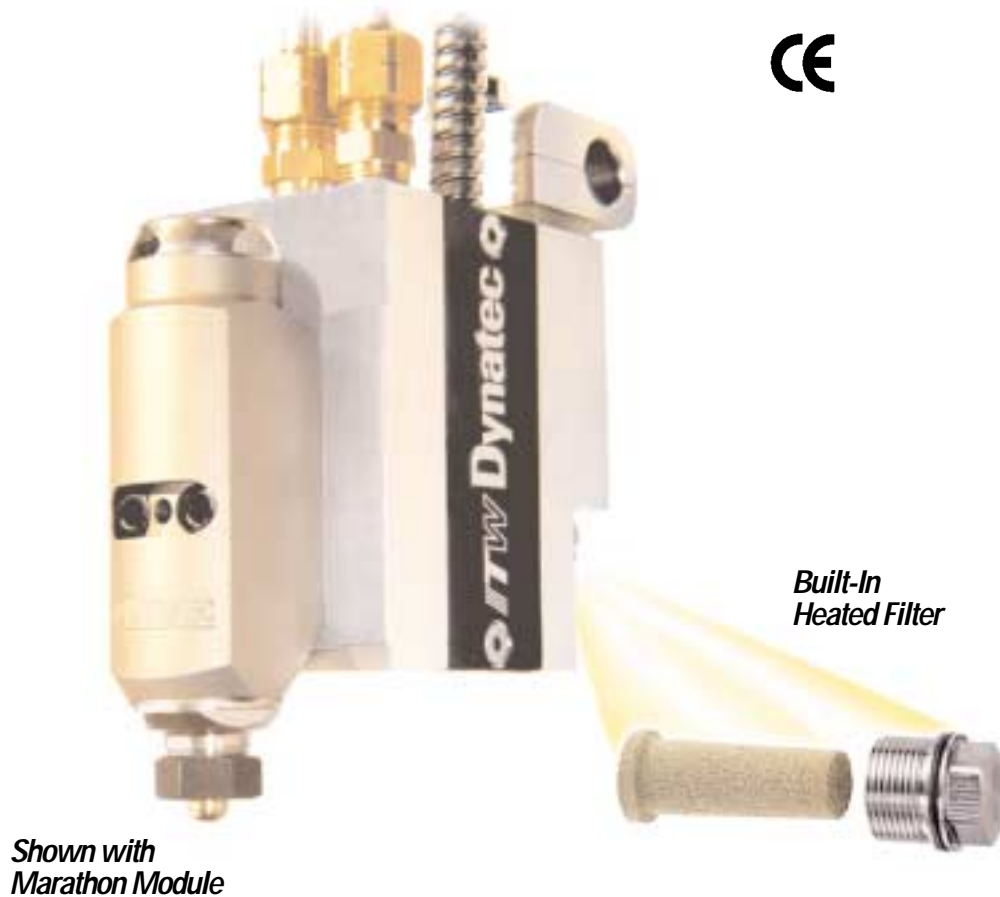


The Dynatec Advantage

- **High Speed Adhesive Valve for Precise Adhesive Placement**
- **Internal Heated Filter Virtually Eliminates Plugged Nozzles ... and Filter Change Doesn't Require Hose Removal**
- **Durazite™ Seals Provide Extremely Long Operating Life**
- **Duty Cycle Exceeds Current Technology Five Fold**
- **Air Open/Air Closed Design Provides Uniform Adhesive Patterns**

TW Dynatec™

Adhesive Application Solutions

BF MOD-PLUS™ APPLICATOR SPECIFICATIONS

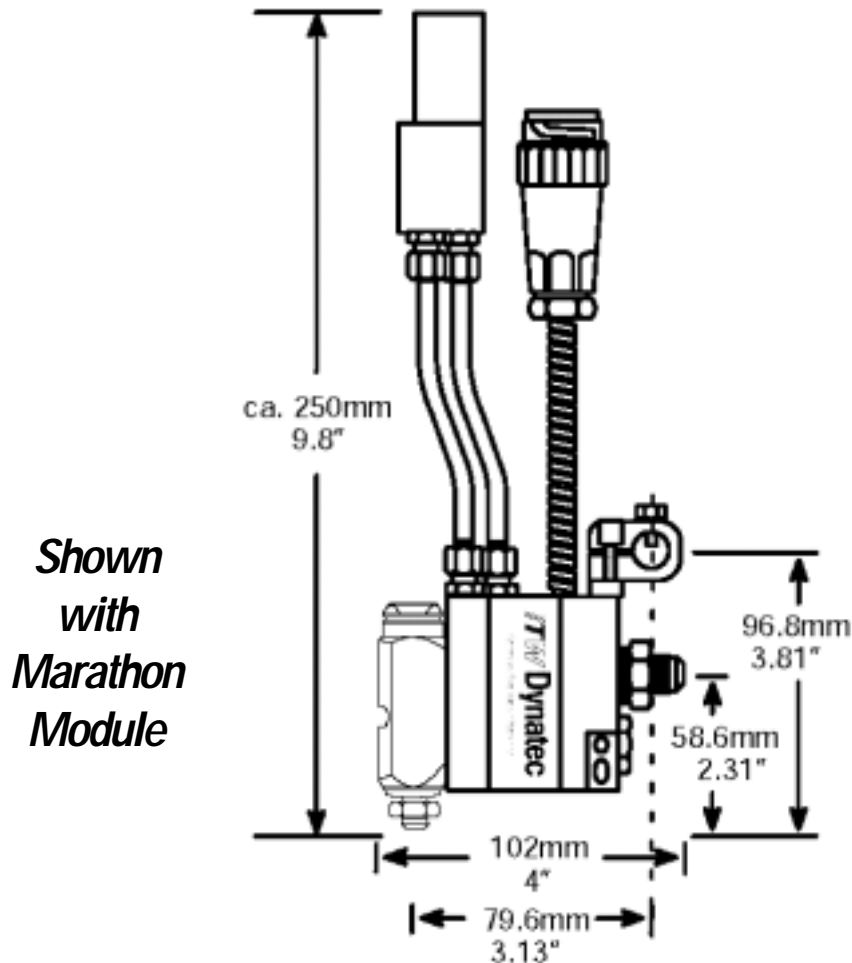

■ **Maximum operating temperature**
200°C / 390°F

■ **Pneumatic pressure** 74 psi (5 bar)
min / 125 psi (9 bar) max

■ **Adhesive pressure** 100 psi (7 bar)
min / 1,000 psi (68 bar) max

■ **Adhesive viscosity** 100 cps min /
20,000 cps max

■ **Maximum on/off cycle speed** 5,000
cycles per minute

Note: Specifications are based on 1,000 cps adhesive.

ITW Dynatec™

Adhesive Application Solutions



AMERICAS

ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615-824-3634
1-800-860-6150
Fax 615-264-5248

ASIA and PACIFIC

ITW Dynatec K.K.
Daiwashinagawa Bldg.,
7-15, Konan, 3-Chome
Minato-Ku, Tokyo 108-0075 Japan
Telephone 81-3-3450-5901
Fax 81-3-3450-8405

EUROPE, AFRICA and MIDDLE EAST

ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone 49-210-4915-0
Fax 49-210-491-5111
e.mail@ITWDynatec.de

itwdynatec.com